

Fittings and Tubing

QS Series

Medium Pressures to 15,000 psi (1034 bar)



Principle of Operation:

Parker Autoclave Engineers has designed and built premium quality valves, fittings and tubing. This commitment to engineering and manufacturing excellence has earned Parker Autoclave Engineers a reputation for reliable, efficient product performance. Parker Autoclave Engineers has long been established as the world leader in high pressure fluid handling components for the chemical/petrochemical, research, and oil and gas industries.

QS Series Compression Sleeve Fittings and Tubing Features:

- QS single bite-type compression sleeve connection for 15,000 psi (1034 bar)
- Available sizes are 1/4, 3/8, 9/16, 3/4 and 1"
- Fittings and tubing manufactured from high strength cold worked 316 stainless steel. Options include 2507® Super Duplex and Inconel 625™
- Molybdenum disulfide-coated gland nuts to prevent galling
- Gland nut positioning mark for assembly
- Connection weep holes for safety and leak detection
- Fast easy make-up of connection
- Operating Temperatures from -100°F (-73°C) to 600°F (316°C)
- 1" QS fitting bodies are 2507® Super Duplex standard

The Medium Pressure QS Series uses Parker Autoclave Engineers' Quick Set bite-type compression sleeve design. This single compression sleeve connection delivers fast, easy make-up and reliable bubble-tight performance in liquid or gas service.



ENGINEERING YOUR SUCCESS.

QS Series: Fittings and Tubing

Medium Pressure Fittings - Pressures to 15,000 psi (1034 bar)




Parker Autoclave Engineers Medium Pressure QS Fittings are designed for use with QS Series valves and medium pressure tubing. These fittings feature improved compression connections with larger orifices for excellent flow capabilities. Parker Autoclave Engineers fittings and components are manufactured of high strength stainless steel.


Connection Components:

All valves and fittings are supplied complete with appropriate glands and compression sleeves. To order these components separately, use order numbers listed. When using plug, sleeve is not required.

Gland
QSG ()



Sleeve
QSS ()



Plug
QSP ()



Add tube size ()

1/4" - 40

3/8" - 60

9/16" - 90

3/4" - 120

1" - 160

To ensure proper fit use Parker Autoclave Engineers tubing. For mounting hole option add suffix PM to catalog number. Consult factory for mounting hole dimensions.

Example: 1/4" Gland - QSG 40

Elbow

| Catalog Number | Connection Type | Outside Diameter Tube | Pressure Rating psi (bar)* | Minimum Opening inches (mm) | Dimensions - inches (mm) | | | | | | | Block Thickness |
|----------------|-----------------|-----------------------|----------------------------|-----------------------------|--------------------------|------------------|-----------------|-----------------|-----------------|-----------------|-------------|-----------------|
| | | | | | A | B | C | D Typical | E | F | G Thickness | |
| QSL4400 | QSF250 | 1/4 (6.35) | 15,000 (1034) | .016 (3.99) | 1.38 (35.05) | 2.00 (50.80) | 0.52 (13.23) | 0.63 (15.88) | 1.00 (25.40) | 1.00 (25.40) | - | 0.75 (19.05) |
| QSL6600 | QSF375 | 3/8 (9.53) | 15,000 (1034) | 0.25 (6.35) | 1.50 (38.10) | 2.00 (50.80) | 0.55 (14.00) | 0.75 (19.05) | 1.00 (25.40) | 1.00 (25.40) | - | 0.81 (20.62) |
| QSL9900 | QSF562 | 9/16 (14.29) | 15,000 (1034) | 0.36 (9.12) | 2.19 (55.58) | 3.00 (76.20) | 0.82 (20.83) | 1.19 (30.18) | 1.50 (38.10) | 1.50 (38.10) | - | 1.25 (31.75) |
| QSL12 | QSF750 | 3/4 (19.05) | 15,000 (1034) | 0.52 (13.11) | 2.94 (74.63) | 4.13 (104.78) | 1.04 (26.37) | 1.50 (38.10) | 2.06 (52.40) | 2.06 (52.40) | - | 1.50 (38.10) |
| QSL16 | QSF1000 | 1 (25.40) | 15,000 (1034) | 0.688 (17.48) | 3.50 (88.90) | 4.75 (120.65) | 1.19 (30.18) | 1.75 (44.45) | 2.38 (60.33) | 2.38 (60.33) | - | 2.00 (50.80) |

Elbow

1" QS fitting bodies are 2507 Super Duplex
For mounting hole option add suffix PM to catalog number.
Consult factory for mounting hole dimensions.

*Maximum pressure rating is based on the lowest rating of any component.
Actual working pressure may be determined by tubing pressure rating, if lower.
All dimensions for reference only and subject to change.

For prompt service, Parker Autoclave Engineers stocks select products.
Consult your local representative.

Tee

| Catalog Number | Connection Type | Outside Diameter Tube | Pressure Rating psi (bar)* | Minimum Opening inches (mm) | Dimensions - inches (mm) | | | | | | | Block Thickness |
|----------------|-----------------|-----------------------|----------------------------|-----------------------------|--------------------------|------------------|-----------------|-----------------|-----------------|-----------------|-------------|-----------------|
| | | | | | A | B | C | D Typical | E | F | G Thickness | |
| QST4440 | QSF250 | 1/4 (6.35) | 15,000 (1034) | 0.16 (3.99) | 1.38 (35.05) | 2.00 (50.80) | 0.52 (13.23) | 0.63 (15.88) | 1.00 (25.40) | 1.00 (25.40) | - | 0.75 (19.05) |
| QST6660 | QSF375 | 3/8 (9.53) | 15,000 (1034) | 0.25 (6.35) | 1.50 (38.10) | 2.00 (50.80) | 0.55 (14.00) | 0.75 (19.05) | 1.00 (25.40) | 1.00 (25.40) | - | 0.81 (20.62) |
| SQT9990 | QSF562 | 1/2 (12.70) | 15,000 (1034) | 0.36 (9.12) | 2.19 (55.58) | 3.00 (76.20) | 0.82 (20.83) | 1.19 (30.18) | 1.50 (38.10) | 1.50 (38.10) | - | 1.25 (31.75) |
| QST12 | QSF750 | 3/8 (9.53) | 15,000 (1034) | 0.52 (13.11) | 2.94 (74.63) | 4.13 (104.78) | 1.04 (26.37) | 1.50 (38.10) | 2.06 (52.40) | 2.06 (52.40) | - | 1.50 (38.10) |
| QST16 | QSF1000 | 1/2 (12.70) | 15,000 (1034) | 0.68 (17.48) | 3.50 (88.90) | 4.75 (120.62) | 1.19 (30.18) | 1.75 (44.45) | 2.38 (60.33) | 2.38 (60.33) | - | 2.00 (50.80) |

Tee


1" QS fitting bodies are 2507 Super Duplex
For mounting hole option add suffix PM to catalog number.
Consult factory for mounting hole dimensions.

*Maximum pressure rating is based on the lowest rating of any component.
Actual working pressure may be determined by tubing pressure rating, if lower.
All dimensions for reference only and subject to change.

For prompt service, Parker Autoclave Engineers stocks select products.
Consult your local representative.

Cross

| Catalog Number | Connection Type | Outside Diameter Tube | Pressure Rating psi (bar)* | Minimum Opening inches (mm) | Dimensions - inches (mm) | | | | | | | Block Thickness |
|----------------|-----------------|-----------------------|----------------------------|-----------------------------|--------------------------|------------------|-----------------|-----------------|-----------------|-----------------|-------------|-----------------|
| | | | | | A | B | C | D Typical | E | F | G Thickness | |
| QSX4444 | QSF250 | 1/4 (6.35) | 15,000 (1034) | 0.16 (3.99) | 2.00 (50.80) | 2.00 (50.80) | 0.52 (13.23) | 0.63 (15.88) | 1.00 (25.40) | 1.00 (25.40) | - | 0.75 (19.05) |
| QSX6666 | QSF375 | 3/8 (9.53) | 15,000 (1034) | 0.25 (6.35) | 2.00 (50.80) | 2.00 (50.80) | 0.55 (14.00) | 0.75 (19.05) | 1.00 (25.40) | 1.00 (25.40) | - | 0.81 (20.62) |
| QSX9999 | QSF562 | 9/16 (14.29) | 15,000 (1034) | 0.36 (9.12) | 3.00 (76.20) | 3.00 (76.20) | 0.82 (20.83) | 1.19 (30.18) | 1.50 (38.10) | 1.50 (38.10) | - | 1.25 (31.75) |
| QSX12 | QSF750 | 3/4 (19.05) | 15,000 (1034) | 0.52 (13.11) | 4.13 (104.78) | 4.13 (104.78) | 1.04 (26.37) | 1.50 (38.10) | 2.06 (52.40) | 2.06 (52.40) | - | 1.50 (38.10) |
| QSX16 | QSF1000 | 1 (25.40) | 15,000 (1034) | 0.68 (17.48) | 4.75 (120.65) | 4.75 (120.65) | 1.19 (30.18) | 1.75 (44.45) | 2.38 (60.33) | 2.38 (60.33) | - | 2.00 (50.80) |



Cross


1" QS fitting bodies are 2507 Super Duplex
For mounting hole option add suffix PM to catalog number.
Consult factory for mounting hole dimensions.

*Maximum pressure rating is based on the lowest rating of any component.
Actual working pressure may be determined by tubing pressure rating, if lower.
All dimensions for reference only and subject to change.

For prompt service, Parker Autoclave Engineers stocks select products.
Consult your local representative.

Straight Coupling

| Catalog Number | Connection Type | Outside Diameter Tube | Pressure Rating psi (bar)* | Minimum Opening inches (mm) | Dimensions - inches (mm) | | | | |
|----------------|-----------------|-----------------------|----------------------------|-----------------------------|--------------------------|------------------|-----------------|-----------------|----------|
| | | | | | A | B | C | D Typical | |
| 15F44QQ | QSF250 | 1/4 (6.35) | 15,000 (1034) | 0.16 (3.99) | 0.75 (19.05) | 1.63 (41.28) | 0.52 (13.23) | 0.63 (15.88) | Straight |
| 15F66QQ | QSF375 | 3/8 (9.53) | 15,000 (1034) | 0.25 (6.35) | 0.81 (20.65) | 1.75 (44.45) | 0.55 (14.00) | 0.75 (19.05) | Straight |
| 15F99QQ | QSF562 | 9/16 (14.29) | 15,000 (1034) | 0.36 (9.12) | 1.38 (34.93) | 2.75 (69.85) | 0.82 (20.83) | 1.19 (30.18) | Straight |
| 15F12Q | QSF750 | 3/4 (19.05) | 15,000 (1034) | 0.52 (13.11) | 1.50 (38.10) | 3.75 (95.25) | 1.04 (26.37) | 1.50 (38.10) | Straight |
| 15F16Q | QSF1000 | 1 (25.40) | 15,000 (1034) | 0.68 (17.48) | 2.00† (50.80) | 4.00 (101.60) | 1.19 (30.23) | 1.75 (44.45) | Straight |



Straight Coupling

1" QS fitting bodies are 2507 Super Duplex
† Distance across flats
Union Couplings are designed with a removable seat insert allowing disassembly and tubing removal without the necessity of loosening other items in a line.

*Maximum pressure rating is based on the lowest rating of any component. Actual working pressure may be determined by tubing pressure rating, if lower. All dimensions for reference only and subject to change.

For prompt service, Parker Autoclave Engineers stocks select products. Consult your local representative.

Bulkhead Coupling

| Catalog Number | Connection Type | Outside Diameter Tube | Pressure Rating psi (bar)* | Minimum Opening inches (mm) | Dimensions - inches (mm) | | | | | | |
|--------------------------|-----------------|-----------------------|----------------------------|-----------------------------|---|------------------|-----------------|-----------------|-----------------|------------------|----------------|
| | | | | | A | B | C | D Typical | E | F | G Thickness |
| 15BF44QQ | QSF250 | 1/4 (6.35) | 15,000 (1034) | 0.16 (3.99) | 0.88 (22.23) | 2.00 (50.80) | 0.52 (13.23) | 0.63 (15.88) | 0.63 (15.88) | 1.00 (25.40) | 0.38 (9.53) |
| 15BF66QQ | QSF375 | 3/8 (9.53) | 15,000 (1034) | 0.25 (6.35) | 1.06 (27.00) | 2.38 (60.33) | 0.55 (14.00) | 0.75 (19.05) | 0.79 (19.94) | 1.38 (34.93) | 0.38 (9.53) |
| 15BF99QQ | QSF562 | 9/16 (14.29) | 15,000 (1034) | 0.36 (9.12) | 1.63 (41.40) | 2.63 (66.68) | 0.82 (20.83) | 1.19 (30.18) | 0.91 (22.99) | 1.75 (44.45) | 0.38 (9.53) |
| 15BF12Q | QSF750 | 3/4 (19.05) | 15,000 (1034) | 0.52 (13.11) | 1.88 (47.63) | 3.50 (88.90) | 1.04 (26.37) | 1.50 (38.10) | 1.50 (38.10) | 2.13 (53.98) | 0.38 (9.53) |
| 15BF16Q | QSF1000 | 1 (25.40) | 15,000 (1034) | 0.68 (17.48) | 2.38 (60.33) | 5.00 (127.00) | 1.19 (30.23) | 1.75 (44.45) | 2.00 (50.80) | 2.50† (63.50) | 0.38 (9.53) |
| | | | | | <p>1" QS fitting bodies are 2507 Super Duplex † Distance across flats Union Couplings are designed with a removable seat insert allowing disassembly and tubing removal without the necessity of loosening other items in a line.</p> <p>*Maximum pressure rating is based on the lowest rating of any component. Actual working pressure may be determined by tubing pressure rating, if lower. All dimensions for reference only and subject to change.</p> | | | | | | |
| Bulkhead Coupling | | | | | <p>For prompt service, Parker Autoclave Engineers stocks select products. Consult your local representative.</p> | | | | | | |

QS Series Tubing

Medium Pressure Tubing - Pressures to 15,000 psi (1034 bar)



Parker Autoclave Engineers offers a complete selection of austenetic, cold drawn stainless steel tubing designed to match the performance standards of Parker Autoclave Engineers valves and fittings. Parker Autoclave Engineers medium pressure tubing is manufactured specifically for high pressure applications requiring both strength and corrosion resistance. The tubing is furnished in random lengths between 20 feet (6 meters) and 26.5 feet (8.0 meters). The average is 24 feet (7.3 meters). Medium Pressure Tubing is available in five sizes and a variety of materials.

Inspection and Testing:

Parker Autoclave Engineer's medium pressure tubing is inspected to assure freedom from seams, laps, fissures or other flaws, as well as carburization or intergranular carbide precipitation. The outside and inside diameters of the tubing are subject to special inspection and are controlled within close tolerances to assure proper fit. Sample pieces of tube for each lot are tested to confirm mechanical properties. Hydrostatic testing is also performed on a statistical basis and is conducted at the working pressure of the tube. Parker Autoclave Engineers will perform 100% hydrostatic testing at additional cost if desired.

Special Material:

In addition to the type 316/316L and 304/304L stainless steel tubing listed in this section, Parker Autoclave Engineers also makes available 2507[®] Super Duplex and Inconel 625[™] materials with no loss of pressure rating. Please consult factory for stock availability.

Note: * Trademark names, Please consult factory for stock availability.

Tubing Tolerance:

| Nominal Tubing Size inches (mm) | Tolerance/Outside Diameter inches (mm) |
|------------------------------------|---|
| 1/4 (6.35) | .248/.243 (6.30/6.17) |
| 3/8 (9.53) | .370/.365 (9.40/9.27) |
| 9/16 (14.27) | .557/.552 (14.15/14.02) |
| 3/4 (19.05) | .745/.740 (18.92/18.80) |
| 1 (25.40) | .995/.990 (25.27/25.14) |

Tubing outside diameter dimensions are not standard commercial sizes.

Tubing outside sizes are specific to Parker Autoclave Engineers design requirements. Parker Autoclave Engineers components will not be compatible with other manufactured tubing.

All dimensions for reference only and subject to change.

| Catalog Number | Tube Material | Fits Connection Type | Tube Size inches (mm) | | | Flow Area in ² (mm ²) | Working Pressure psi (bar)* | | | |
|----------------|---------------|----------------------|-----------------------|-----------------|----------------|--|---------------------------------|---------------|---------------|---------------|
| | | | Outside Diameter | Inside Diameter | Wall Thickness | | -425 to -100°F (-252 to 37.8°C) | 200°F (93°C) | 400°F (204°C) | 600°F (316°C) |
| MS15-092** | 316SS | QSF250 | 1/4 (6.35) | 0.109 (2.77) | .070 (1.78) | 0.009 (5.81) | 20,000 (1379) | 20,000 (1379) | 19,250 (1327) | 18,050 (1244) |
| MS15-192** | 304SS | | | | | | 20,000 (1379) | 18,950 (1307) | 17,200 (1186) | 17,000 (1172) |
| MS15-093** | 316SS | QSF375 | 3/8 (9.53) | 0.203 (5.16) | 0.086 (2.18) | 0.032 (20.65) | 20,000 (1379) | 20,000 (1379) | 19,250 (1327) | 18,050 (1244) |
| MS15-193** | 304SS | | | | | | 20,000 (1379) | 20,000 (1379) | 19,250 (1327) | 18,050 (1244) |
| MS15-097 | 316SS | QSF562 | 9/16 (14.29) | 0.359 (9.12) | 0.101 (2.57) | 0.101 (2.57) | 15,000 (1034) | 15,000 (1034) | 15,000 (1034) | 15,000 (1034) |
| MS15-098 | 316SS | QSF750 | 3/4 (19.05) | 0.516 (13.11) | 0.117 (2.97) | 0.209 (134.84) | 15,000 (1034) | 15,000 (1034) | 14,400 (993) | 13,650 (941) |
| MS15-099 | 316SS | 1000562 | 1 (25.40) | 0.688 (17.48) | 0.156 (3.96) | 0.371 (239) | 15,000 (1034) | 15,000 (1034) | 14,400 (9934) | 13,650 (941) |

* Maximum pressure rating is based on the lowest rating of any component. ** Larger inside diameters are available as special order.

Actual working pressure may be determined by tubing pressure rating, if lower. For prompt service, Parker Autoclave Engineers stocks select products. Consult your local representative.

QS Series Nipples

Medium Pressure - Pressures to 15,000 psi (1034 bar)



For rapid system make-up, Parker Autoclave Engineers supplies pre-assembled nipples in various sizes and lengths for Parker Autoclave QSS valves and fittings.

Special Lengths:

In addition to the standard lengths listed in the table below, nipples are available in any custom length. Consult factory.

Materials:


Catalog numbers in table refer to Type 316 Stainless Steel.

Nipple Specifications:

| Catalog Number | | | | | Fits Connection Type | Tube Size inches (mm) | | Working Pressure @ 100°F (37.8°C) psi (bar) |
|----------------------------|----------------|----------------|-----------------|-----------------|----------------------|-----------------------|-----------------|---|
| Nipple Length: inches (mm) | | | | | | Outside Diameter | Inside Diameter | |
| 4.00" (101.60) | 6.00" (152.40) | 8.00" (203.20) | 10.00" (254.60) | 12.00" (304.80) | | | | |
| QNA4404-316 | QNA4406-316 | QNA4408-316 | QNA44010-316 | QNA44012-316 | QSF250 | 1/4 (6.35) | 0.109 (2.77) | 15,000 (1034) |
| QNA6604-316 | QNA6606-316 | QNA6608-316 | QNA66010-316 | QNA66012-316 | QSF375 | 3/8 (9.53) | 0.203 (5.16) | 15,000 (1034) |
| | QNA9906-316 | QNA9908-316 | QNA99010-316 | QNA99012-316 | QSF562 | 9/16 (14.29) | 0.359 (9.12) | 15,000 (1034) |
| | | QNA1208-316 | QNA12010-316 | QNA12012-316 | QSF750 | 3/4 (19.05) | 0.516 (13.11) | 15,000 (1034) |
| | | QNA1608-316 | QNA16010-316 | QNA16012-316 | QSF1000 | 1 (25.40) | 0.688 (17.48) | 15,000 (1034) |


Close Tube Port Connectors:

| Model | Size inches (mm) | Fits Connection Type | Dimension "L" inches (mm) |
|-------------|------------------|----------------------|---------------------------|
| QTS4403.25 | 1/4 (6.35) | QSF250 | 3.25 (82.55) |
| QTS6603.50 | 3/8 (9.53) | QSF375 | 3.50 (88.90) |
| QTS9905.25 | 9/16 (14.29) | QSF562 | 5.25 (133.35) |
| QTS1206.375 | 3/4 (19.05) | QSF750 | 6.38 (162.10) |

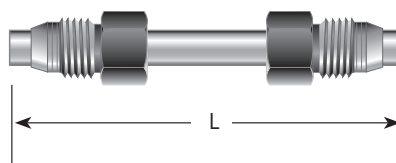


Elbow Tube:

| Model | Size inches (mm) | Fits Connection Type | Dimension "H" inches (mm) | Dimension "R" inches (mm) | Dimension "Ri" inches (mm) |
|----------|------------------|----------------------|---------------------------|---------------------------|----------------------------|
| QTE44-90 | 1/4 (6.35) | QSF250 | 3.25 (82.55) | 0.563 (14.30) | 0.438 (11.13) |
| QTE66-90 | 3/8 (9.53) | QSF375 | 3.50 (88.90) | 0.938 (23.83) | 0.75 (19.05) |
| QTE99-90 | 9/16 (14.29) | QSF562 | 7.50 (19.05) | 2.906 (73.82) | 2.625 (66.68) |
| QTE12-90 | 3/4 (19.05) | QSF750 | 10.00 (254.00) | 3.875 (98.43) | 3.5 (88.9) |
| QTE16-90 | 1 (25.40) | QSF1000 | 11.50 (292.10) | 5.125 (13.30) | 4.625 (117.48) |

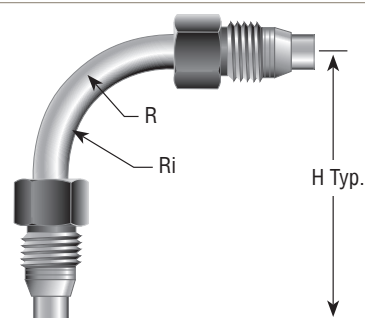

QS Series Check Valves

Medium Pressure Check Valves - Pressures to 15,000 psi (1034 bar)

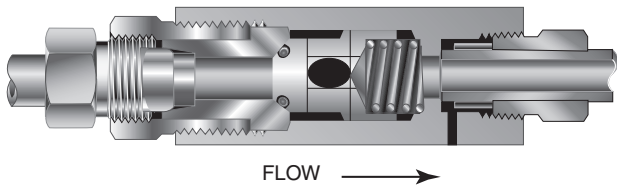


O-Ring Check Valve

Provide unidirectional flow and tight shut-off for liquids and gases with high reliability. When differential drops below cracking pressure*, valve shuts off. **(Not for use as relief valve.)**

Materials: 316 Stainless Steel: Body, cover, poppet, cover gland. 300 Stainless Steel: Spring. Except 1" - see note below. Standard O-ring: Viton, for operation to 400° F (204°C). Buna-N or PTFE available for 250°F (121°C) or 400°F (204°C) respectively; specify when ordering.

Cracking Pressure*: 20 psi (1.38 bar) \pm 30%. Springs for higher cracking pressures (up to 100 psi (6.89bar)) available on special order for O-ring style check valves only.

Temperature: Minimum operating temperature for standard o-ring check valves 0°F (-17.8°C). For low temperature option to -100°F (-73°C) add suffix **-TO** (PTFE O-ring)

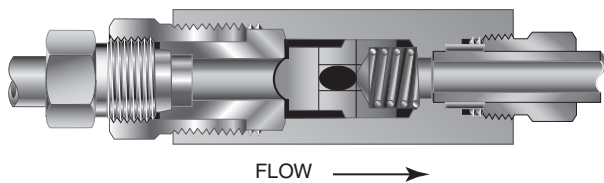

Ball Check Valve

Prevent reverse flow where leak-tight shut-off is not mandatory. When differential drops below cracking pressure, valve closes. With all-metal components, valve can be used up to 650°F (343°C). See Technical Information section for connection temperature limitations. **(Not for use as relief valve.)**

Ball and poppet are an integral design to assure positive, in-line seating without “chatter”. Poppet is designed essentially for axial flow with minimum pressure drop.

Materials: 316 Stainless Steel: body, cover, cover gland, ball poppet. 300 Series Stainless Steel: spring

Temperature: Minimum operating temperature for standard ball check valves -100°F (-73°C).

Basic Repair Kits:

Add “R” to the front of valve catalog first 4 numbers for proper repair kit. (Example: R2B16S). Consult your Parker Autoclave Representative for pricing on repair kits. Refer to the Operation and Maintenance manual for proper maintenance procedures.

CAUTION: While testing has shown O-Rings to provide satisfactory service life, both cyclic and shelf life may vary widely with differing service conditions, properties of reactants, pressure and temperature cycling and age of the O-ring. FREQUENT INSPECTIONS SHOULD BE MADE to detect any deterioration, and O-rings replaced as required.

CAUTION: See Tubing section for proper selection of tubing.


NOTE: For optional material see Needle Valve Options section.

O-Ring Check Valves

| Catalog Number | Fits Connection Type | Pressure Rating psi (bar)* | Orifice inches (mm) | Rated Cv | Dimensions - inches (mm) | | | | |
|----------------|----------------------|----------------------------|---------------------|----------|--------------------------|---------------|--------------|--------------|---------------|
| | | | | | A | B | C | D Typical | Hex |
| QSO4400 | QSF250 | 15,000 (1034) | .188 (4.78) | .15 | 3.18 (80.77) | 2.56 (65.02) | 0.44 (11.18) | 0.63 (16.00) | 0.81 (20.57) |
| QSO6600 | QSF375 | 15,000 (1034) | .312 (7.93) | .63 | 3.56 (90.42) | 3.00 (76.20) | 0.53 (13.46) | 0.75 (19.05) | 1.00 (25.40) |
| QSO9900 | QSF562 | 15,000 (1034) | .359 (9.12) | 2.30 | 5.21 (132.33) | 4.50 (114.30) | 0.81 (30.18) | 1.19 (30.18) | 1.75 (44.45) |
| QSO12 | QSF750 | 15,000 (1034) | .516 (13.11) | 4.70 | 6.40 (162.56) | 5.50 (139.70) | 1.03 (26.16) | 1.50 (38.10) | 1.88† (47.75) |
| QSO16 | QSF1000 | 15,000 (1034) | .688 (17.48) | 14.00 | 8.92 (226.57) | 7.52 (191.10) | 1.19 (30.23) | 1.75 (44.45) | 3.00† (76.20) |

Ball Check Valves

| | | | | | | | | | |
|---------|---------|---------------|--------------|-------|---------------|---------------|--------------|--------------|---------------|
| QSB4400 | QSF250 | 15,000 (1034) | .188 (4.78) | .15 | 3.18 (80.77) | 2.56 (65.02) | 0.44 (11.18) | 0.63 (16.00) | 0.81 (20.57) |
| QSB6600 | QSF375 | 15,000 (1034) | .312 (7.93) | .63 | 3.56 (90.42) | 3.00 (76.20) | 0.53 (13.46) | 0.75 (19.05) | 1.00 (25.40) |
| QSB9900 | QSF562 | 15,000 (1034) | .359 (9.12) | 2.30 | 5.21 (132.33) | 4.50 (114.30) | 0.81 (30.18) | 1.19 (30.18) | 1.75 (44.45) |
| QSB12 | QSF750 | 15,000 (1034) | .516 (13.11) | 4.70 | 6.40 (162.56) | 5.50 (139.70) | 1.03 (26.16) | 1.50 (38.10) | 1.88† (47.75) |
| QSB16 | QSF1000 | 15,000 (1034) | .688 (17.48) | 14.00 | 8.92 (226.57) | 7.52 (191.10) | 1.19 (30.23) | 1.75 (44.45) | 3.00† (76.20) |

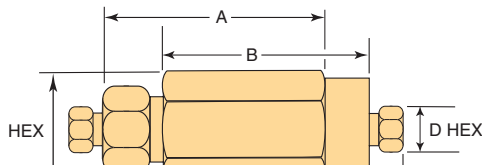

O-Ring Check Valves

Note:

All check valves are furnished complete with connection components unless otherwise specified.


† Distance across flats

1" check valve bodies, cover, and cover gland are 2507 Super Duplex standard.

*Maximum pressure rating is based on the lowest rating of any component. Actual working pressure may be determined by tubing pressure rating, if lower. All dimensions for reference only and subject to change. For prompt service, Parker Autoclave stocks select products. Consult your local representative.

QS Series Line Filters

Low Pressure Line Filter - Pressures to 15,000 psi (1034 bar)

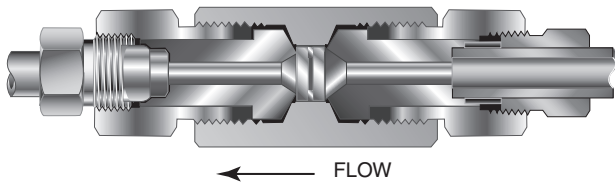


Dual Disc Line Filters

Dual-Disc Line Filters are utilized in numerous industrial, chemical processing, aerospace, nuclear and other applications. With the dual-disc design, large contaminant particles are trapped by the upstream filter element before they can reach and clog the smaller micron-size downstream element. Filter elements can be easily replaced.

Materials: 316 Stainless Steel: Body, covers and gland nuts. Filters: 316L Stainless Steel.

Filter Element: Downstream/upstream micron size 35/65 is standard. 5/10 or 10/35 also available when specified. Other element combinations available on special order.

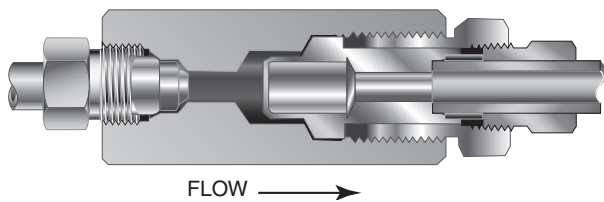

Cup Type Line Filters

High Flow Cup-Type Line Filters are recommended in low pressure systems requiring both high flow rates and maximum filter surface area. Widely used in the industrial and chemical processing fields, the cup design offers as much as six times the effective filter area as compared to disc-type units. In addition, the filter elements can be quickly and easily replaced.

Materials: 316 Stainless Steel: Body, covers and gland nuts. Filter: 316L Stainless Steel.

Filter Element: 300 Series Stainless Steel sintered cup. Standard elements available in choice of 5, 35 or 65 micron sizes. **Note:** Filter ratings are nominal.

NOTE 1: All filters furnished complete with connection components unless otherwise specified. All dimensions for reference only and subject to change. For optional materials, see Needle Valve Options section

NOTE 2: Parker Autoclave Engineers disc and cup type filters are designed to filter small amounts of process particles. It is recommended that all fluids are thoroughly cleaned prior to entering the higher pressure system.

NOTE 3: Special material filters may be supplied with four flats in place of standard hex.

NOTE 4: Pressure differential not to exceed 1,000 psi (69 bar) in a flowing condition.


NOTE 5: Larger micron size filter element is installed on the upstream (inlet) side.

Dual Disc Line Filters


| Catalog Number | Pressure Rating psi (bar)* | Orifice inches (mm) | Micron Size** | Connection Size and Type | Effective Filter Elements Area in ² (mm ²) | Dimensions - inches (mm) | | | | |
|----------------|-------------------------------|---------------------------|------------------|-----------------------------|---|--------------------------|-----------------|-----------------|-----------------|-----------------|
| | | | | | | A | B | C | D Typical | Hex |
| SLF2200 | 15,000 (1034) | .094 (2.39) | 35/65 | W125 | .06 (38.70) | 2.31 (58.67) | 1.25 (31.75) | 0.31 (7.87) | 0.50 (12.70) | 0.62 (15.74) |
| SLF2200-5/10 | | | 5/10 | | | | | | | |
| SLF2200-10/35 | | | 10/35 | | | | | | | |
| SLF4400 | 15,000 (1034) | .125 (3.18) | 35/65 | SW250 | .15 (96.77) | 2.94 (75.56) | 1.68 (42.67) | 0.44 (11.17) | 0.63 (15.88) | 0.81 (20.57) |
| SLF4400-5/10 | | | 5/10 | | | | | | | |
| SLF4400-10/35 | | | 10/35 | | | | | | | |
| SLF6600 | 15,000 (1034) | .188 (4.78) | 35/65 | SW375 | .15 (96.77) | 2.94 (75.56) | 1.68 (42.67) | 0.53 (13.46) | 0.75 (19.05) | 1.00 (25.40) |
| SLF6600-5/10 | | | 5/10 | | | | | | | |
| SLF6600-10/35 | | | 10/35 | | | | | | | |
| SLF8800 | 10,000 (689) | .250 (6.35) | 35/65 | SW500 | .25 (161.29) | 3.56 (90.42) | 1.94 (49.27) | 0.53 (13.46) | 0.93 (23.62) | 1.18 (29.97) |
| SLF8800-5/10 | | | 5/10 | | | | | | | |
| SLF8800-10/35 | | | 10/35 | | | | | | | |

Cut Type Line Filters

| | | | | | | | | | | |
|---------|------------------|-----------------|----|-------|------------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| SWF4-5 | 15,000 (1034) | .188 (4.78) | 5 | SW250 | .81 (522.57) | 3.18 (80.77) | 2.56 (65.02) | 0.44 (11.17) | 0.63 (15.88) | 0.81 (20.57) |
| SWF4-35 | | | 35 | | | | | | | |
| SWF4-65 | | | 65 | | | | | | | |
| SWF6-5 | 15,000 (1034) | .312 (7.92) | 5 | SW375 | .81 (522.57) | 3.56 (90.42) | 3.00 (76.20) | 0.53 (13.46) | 0.75 (19.05) | 1.00 (25.40) |
| SWF6-35 | | | 35 | | | | | | | |
| SWF6-65 | | | 65 | | | | | | | |
| SWF8-5 | 10,000 (689) | .438 (11.13) | 5 | SW500 | 1.53 (987.09) | 3.18 (80.77) | 2.56 (65.02) | 0.53 (13.46) | 0.93 (23.62) | 1.38 (35.05) |
| SWF8-35 | | | 35 | | | | | | | |
| SWF8-65 | | | 65 | | | | | | | |

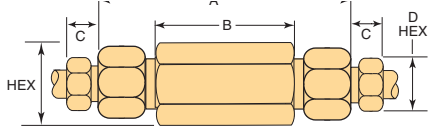

Dual Disc Line Filters

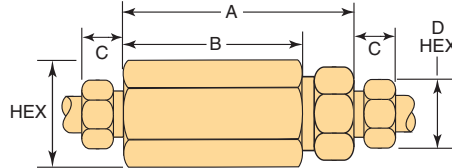

Cup Type Line Filters

** Larger micron size filter element is installed on upstream (inlet) side. All filters furnished complete with connection components unless otherwise specified.

Other micron sizes available on special order. Change last digits of the catalog number accordingly. For optional materials, see Needle Valve Options section.

The 1/16" Tubing System is a complete system for use with all 1/8" components for pressure to 15,000 psi (1034 bar). Consult factory.

*Maximum pressure rating is based on the lowest rating of any component. Actual working pressure may be determined by tubing pressure rating, if lower. All dimensions for reference only and subject to change.

For prompt service, Parker Autoclave Engineers stocks select products. Consult your local representative.

NOTES:



High Pressure
Valves • Fittings • Tubing
to 150,000 psi.



Reactors • Vessels
Instrumentation



Air Driven, High Flow,
High Pressure Liquid Pumps

THIS IS PARKER

Parker's Motion & Control Technologies

At Parker, we're guided by a relentless drive to help our customers become more productive and achieve higher levels of profitability by engineering the best systems for their requirements. It means looking at customer applications from many angles to find new ways to create value. Whatever the motion and control technology need, Parker has the experience, breadth of product and global reach to consistently deliver. No company knows more about motion and control technology than Parker. For further information call 1-800-C-Parker.

| MARKET | KEY MARKETS | KEY PRODUCTS | | |
|---|--|---|--|---|
|  AEROSPACE | Aircraft Engines Commercial Commerical Transports Military Aircraft Regional Transports | Business and General Aviation Land-Based Weapons Systems Missiles and Launch Vehicles Unmanned Aerial Vehicles | Flight Control Systems & Components Fluid Conveyance Systems Fluid Metering Delivery & Atomization Devices Fuel Systems & Components | Hydraulic Systems & Components Inert Nitrogen Generating Systems Pneumatic Systems & Components Wheels & Brakes |
|  CLIMATE CONTROL | Agriculture Food, Beverage and Dairy Precision Cooling Transportation | Air Conditioning Life Sciences & Medical Processing | Co2 Controls Electronic Controllers Filter Driers Hand Shut-Off Valves Hose & Fittings | Pressure Regulating Valves Refrigerant Distributors Safety Relief Valves Solenoid Valves Thermostatic Expansion Valves |
|  ELECTRO-MECHANICAL | Aerospace Life Science & Medical Packaging Machinery Plastics Machinery & Converting Semiconductor & Electronics Factory Automation | Machine Tools Paper Machinery Primary Metals Textile Wire & Cable | AC/DC Drives & Systems Electric Actuators, Gantry Robots & Slides Electrohydrostatic Actuation Systems Electromechanical Actuation Systems Human Machine Interface | Linear Motors Stepper Motors, Servo Motors Drives & Controls Structural Extrusions |
|  FILTRATION | Food & Beverage Life Sciences Mobile Equipment Power Generation Transportation | Industrial Machinery Marine Oil & Gas Process | Analytical Gas Generators Compressed Air & Gas Filters Condition Monitoring Engine Air, Fuel & Oil Filtration & Systems | Hydraulic, Lubrication & Coolant Filters Process, Chemical, Water Microfiltration Filters Nitrogen, Hydrogen & Zero Air Generators |
|  FLUID and GAS HANDLING | Aerospace Agriculture Bulk Chemical Handling Construction Machinery Food & Beverage Fuel & Gas Delivery | Industrial Machinery Mobile Oil & Gas Transportation Welding | Brass Fittings & Valves Diagnostic Equipment Fluid Conveyance Systems Industrial Hose | PTFE & PFA Hose, Tubing & Plastic Fittings Rubber & Thermoplastic Hose & Couplings Tube Fittings & Adapters Quick Disconnects |
|  HYDRAULICS | Aerospace Aerial lift Agriculture Construction Machinery Forestry | Industrial Machinery Mining Oil & Gas Power Generation & Energy Truck Hydraulics | Diagnostic Equipment Hydraulic Cylinders & Accumulators Hydraulic Motors & Pumps Hydraulic Systems Hydraulic Valves & Controls | Power Take-Offs Rubber & Thermoplastic Hose & Couplings Tube Fittings & Adapters Quick Disconnects |
|  PNEUMATICS | Aerospace Conveyor & Material Handling Factory Automation Life Science & Medical | Machine Tools Packaging Machinery Transportation & Automotive | Air Preparation Brass Fittings & Valves Manifolds Pneumatic Accessories Pneumatic Actuators & Grippers Pneumatic Valves & Controls | Quick Disconnects Rotary Actuators Rubber & Thermoplastic Hose & Couplings Structural Extrusions Thermoplastic Tubing & Fittings Vacuum Generators, Cups & Sensors |
|  PROCESS CONTROL | Chemical & Refining Food, Beverage & Dairy Medical & Dental | Microelectronics Oil & Gas Power Generation | Analytical Sample Conditioning Products & Systems Fluoropolymer Chemical Delivery Fittings, Valves & Pumps High Purity Gas Delivery Fittings, & Valves & Regulators | Instrumentation Fittings, Valves Regulators Medium Pressure Fittings & Valves Process Control Manifolds |
|  SEALING and SHIELDING | Aerospace Chemical Processing Consumer Energy, Oil & Gas Fluid Power General Industrial | Information Technology Life Sciences Military Semiconductor Transportation | Dynamic Seals Elastomeric O-Rings Emi Shielding Extruded & Precision-Cut, Fabricated Elastomeric Seals | Homogeneous & Inserted Elastomeric Shapes High Temperature Metal Seals Metal & Plastic Retained Composite Seals Thermal Management |

Parker Worldwide

North America

USA – Corporate, Cleveland, OH
Tel: +1 256 896 3000

USA – IPD, Huntsville, AL
Tel: +1 256 881 2040
ipdcct@parker.com

USA – IPD, (Autoclave), Erie, PA
Tel: +1 814 860 5700
ipdaect@parker.com

CA – Canada, Grimsby, Ontario
Tel: +1 905-945-2274
ipd_canada@parker.com

South America

AR – Argentina, Buenos Aires
Tel: +54 3327 44 4129
falecom@parker.com

BR – Brazil, Diadema, SP
Tel: +55 11 4360 6700
falecom@parker.com

CL – Chile, Santiago
Tel: +56 (0) 2 2303 9640
falecom@parker.com

MX – Mexico, Toluca
Tel: +52 722 275 4200
contacto@parker.com

Asia Pacific

AU – Australia, Dandenong
Tel: +61 (0)2 9842 5150
customer.service.au@parker.com

CN – China, Shanghai
Tel: +86 21 2899 5000
INGtechnical.china@parker.com

HK – Hong Kong
Tel: +852 2428 8008

IN – India, Mumbai
Tel: +91 22 6513 7081-85

ID – Indonesia, Tangerang
Tel: +62 2977 7900
parker.id@parker.com

JP – Japan, Tokyo
Tel: +(81) 3 6365 4020
infophj@parker.com

KR – South Korea, Seoul
Tel: +82 2 559 0400
parkerkr@parker.com

MY – Malaysia, Selangor
Tel: +603 784 90 800
parkermy@parker.com

SG – Singapore,
Tel: +65 6887 6300
parkerkg@parker.com

TH – Thailand, Bangkok
Tel: +66 2 186 7000
phthailand@parker.com

TW – Taiwan, Taipei
Tel: +886 2 2298 8987
enquiry.taiwan@parker.com

VN – Vietnam, Hochi Minh City
Tel: +848 382 508 56
parker_viet@parker.com

Europe, Middle East, Africa

AE – UAE, Dubai
Tel: +971 4 812 7100
parker.me@parker.com

AT – Austria, Wiener Neustadt
Tel: +43 (0)2622 23501-0
parker.austria@parker.com

AT – Eastern Europe, Wiener Neustadt
Tel: +43 (0)2622 23501 900
parker.easteurope@parker.com

AZ – Azerbaijan, Baku
Tel: +994 50 2233 458
parker.azerbaijan@parker.com

BE/LU – Belgium, Nivelles
Tel: +32 (0)67 280 900
parker.belgium@parker.com

BG – Bulgaria, Sofia
Tel: +359 2 980 1344
parker.bulgaria@parker.com

BY – Belarus, Minsk
Tel: +48 (0)22 573 24 00
parker.belarus@parker.com

CH – Switzerland, Etoy
Tel: +41 (0) 21 821 87 00
parker.switzerland@parker.com

CZ – Czech Republic, Klecany
Tel: +420 284 083 111
parker.czechrepublic@parker.com

DE – Germany, Kaarst
Tel: +49 (0)2131 4016 0
parker.germany@parker.com

DK – Denmark, Ballerup
Tel: +45 43 56 04 00
parker.denmark@parker.com

ES – Spain, Madrid
Tel: +34 902 33 00 01
parker.spain@parker.com

FI – Finland, Vantaa
Tel: +358 (0)20 753 2500
parker.finland@parker.com

FR – France, Contamine s/Arve
Tel: +33 (0)4 50 25 80 25
parker.france@parker.com

GR – Greece, Athens
Tel: +30 210 933 6450
parker.greece@parker.com

HU – Hungary, Budapest
Tel: +36 223 885 470
parker.hungary@parker.com

IE – Ireland, Dublin
Tel: +353 (0)1 466 6370
parker.ireland@parker.com

IT – Italy, Corsico (MI)
Tel: +39 02 45 19 21
parker.italy@parker.com

KZ – Kazakhstan, Almaty
Tel: +7 7273 561 000
parker.easteurope@parker.com

NL – The Netherlands, Oldenzaal
Tel: +31 (0)541 585 000
parker.nl@parker.com

NO – Norway, Stavanger
Tel: +47 66 75 34 00
parker.norway@parker.com

PL – Poland, Warsaw
Tel: +48 (0)22 573 24 00
parker.poland@parker.com

PT – Portugal, Leca da Palmeira
Tel: +351 22 999 7360
parker.portugal@parker.com

RO – Romania, Bucharest
Tel: +40 21 252 1382
parker.romania@parker.com

RU – Russia, Moscow
Tel: +7 495 645-2156
parker.russia@parker.com

SE – Sweden, Spånga
Tel: +46 (0)8 59 79 50 00
parker.sweden@parker.com

SK – Slovakia, Banská Bystrica
Tel: +421 484 162 252
parker.slovakia@parker.com

SL – Slovenia, Novo Mesto
Tel: +386 7 337 6650
parker.slovenia@parker.com

TR – Turkey, Istanbul
Tel: +90 216 4997081
parker.turkey@parker.com

UA – Ukraine, Kiev
Tel: +48 (0)22 573 24 00
parker.ukraine@parker.com

UK – United Kingdom, Warwick
Tel: +44 (0)1926 317 878
parker.uk@parker.com

ZA – South Africa, Kempton Park
Tel: +27 (0)11 961 0700
parker.southafrica@parker.com

! CAUTION !

Do not mix or interchange component parts or tubing with those of other manufacturers. Doing so is unsafe and will void warranty.

Parker Autoclave Engineers Valves, Fittings, and Tools are not designed to interface with common commercial instrument tubing and are designed to only connect with tubing manufactured to Parker Autoclave Engineers AES specifications. Failure to do so is unsafe and will void warranty.

WARNING

FAILURE, IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS AND/OR SYSTEMS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE.

This document and other information from Parker Hannifin Corporation, its subsidiaries and authorized distributors provide product and/or system options for further investigation by users having technical expertise. It is important that you analyze all aspects of your application and review the information concerning the product or system in the current product catalog. Due to the variety of operating conditions and applications for these products or systems, the user, through its own analysis and testing, is solely responsible for making the final selection of the products and systems and assuring that all performance, safety and warning requirements of the application are met. The products described herein, including without limitation, product features, specifications, designs, availability and pricing, are subject to change by Parker Hannifin Corporation and its subsidiaries at any time without notice.

Offer of Sale

The items described in this document are available for sale by Parker Hannifin Corporation, its subsidiaries or its authorized distributors. Any sale contract entered by Parker will be governed by the provisions stated in Parker's standard terms and conditions of sale (copy available upon request).



Instrumentation Products Division
Autoclave Engineers Operation
8325 Hessinger Drive
Erie, PA 16509-4679
Tel: 814 860 5700
Fax: 814 860 5811
www.autoclave.com
www.parker.com/ipd

Instrumentation Products Division
Division Headquarters
1005 A Cleaner Way
Huntsville, AL 35805 USA
Tel: 256 881 2040
Fax: 256 881 5072

Parker Hannifin Manufacturing Ltd.
Instrumentation Products Division,
Europe
Riverside Road
Pottington Business Park
Barnstaple, UK, EX31 1NP, UK
Tel: 44 1271 313131
Fax: 44 1271 373636