



Liquid Pump





Rapid Reference Guide

PERFORMANCE • QUALITY • RELIABILITY





Performance Curves 1/3 hp (.25 kW) Pumps

AIR DRIVE PRESSURE (Solid curved lines) AIR DRIVE FLOW (Dotted curve lines)

Shaded areas indicate excessive cycle rates and should be avoided except for intermittent duty.

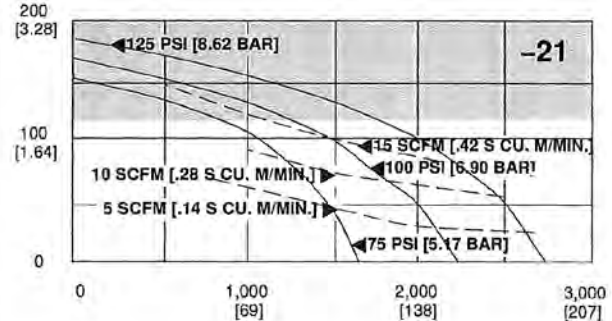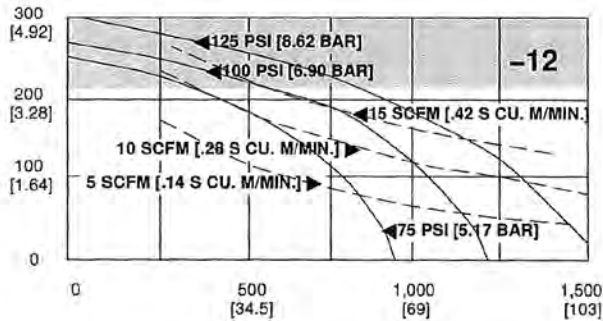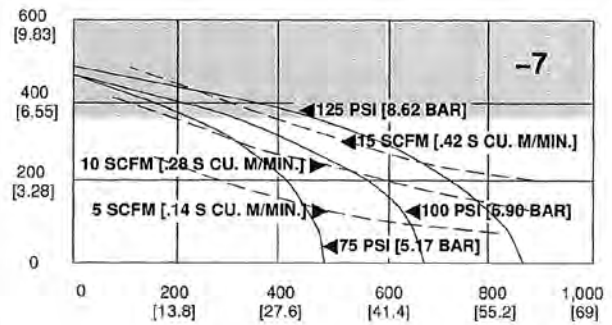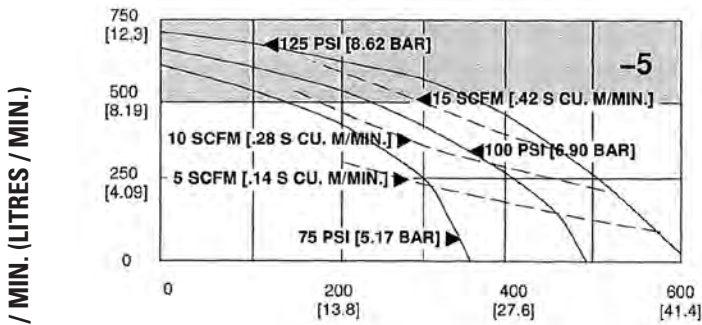


OUTLET PRESSURE PSI (BAR)

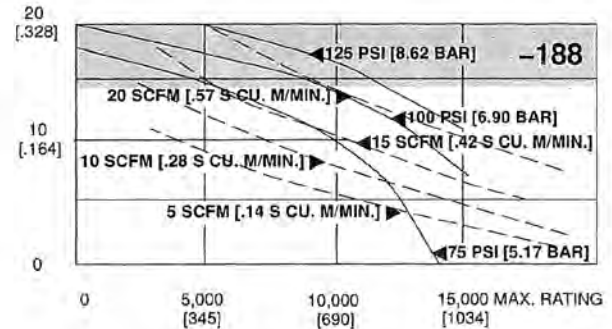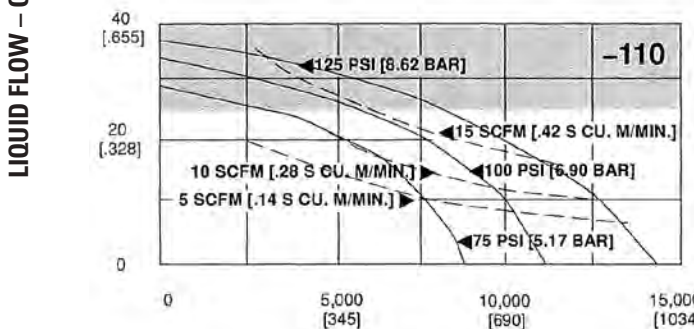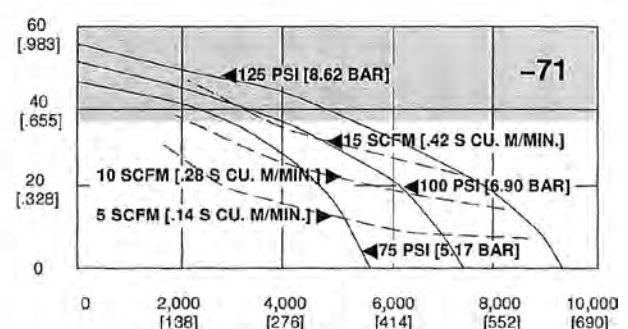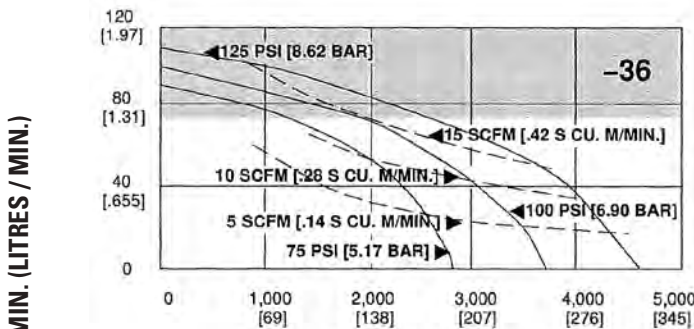



OUTLET PRESSURE PSI (BAR)

Performance Curves 3/4 hp (.56 kW) Pumps




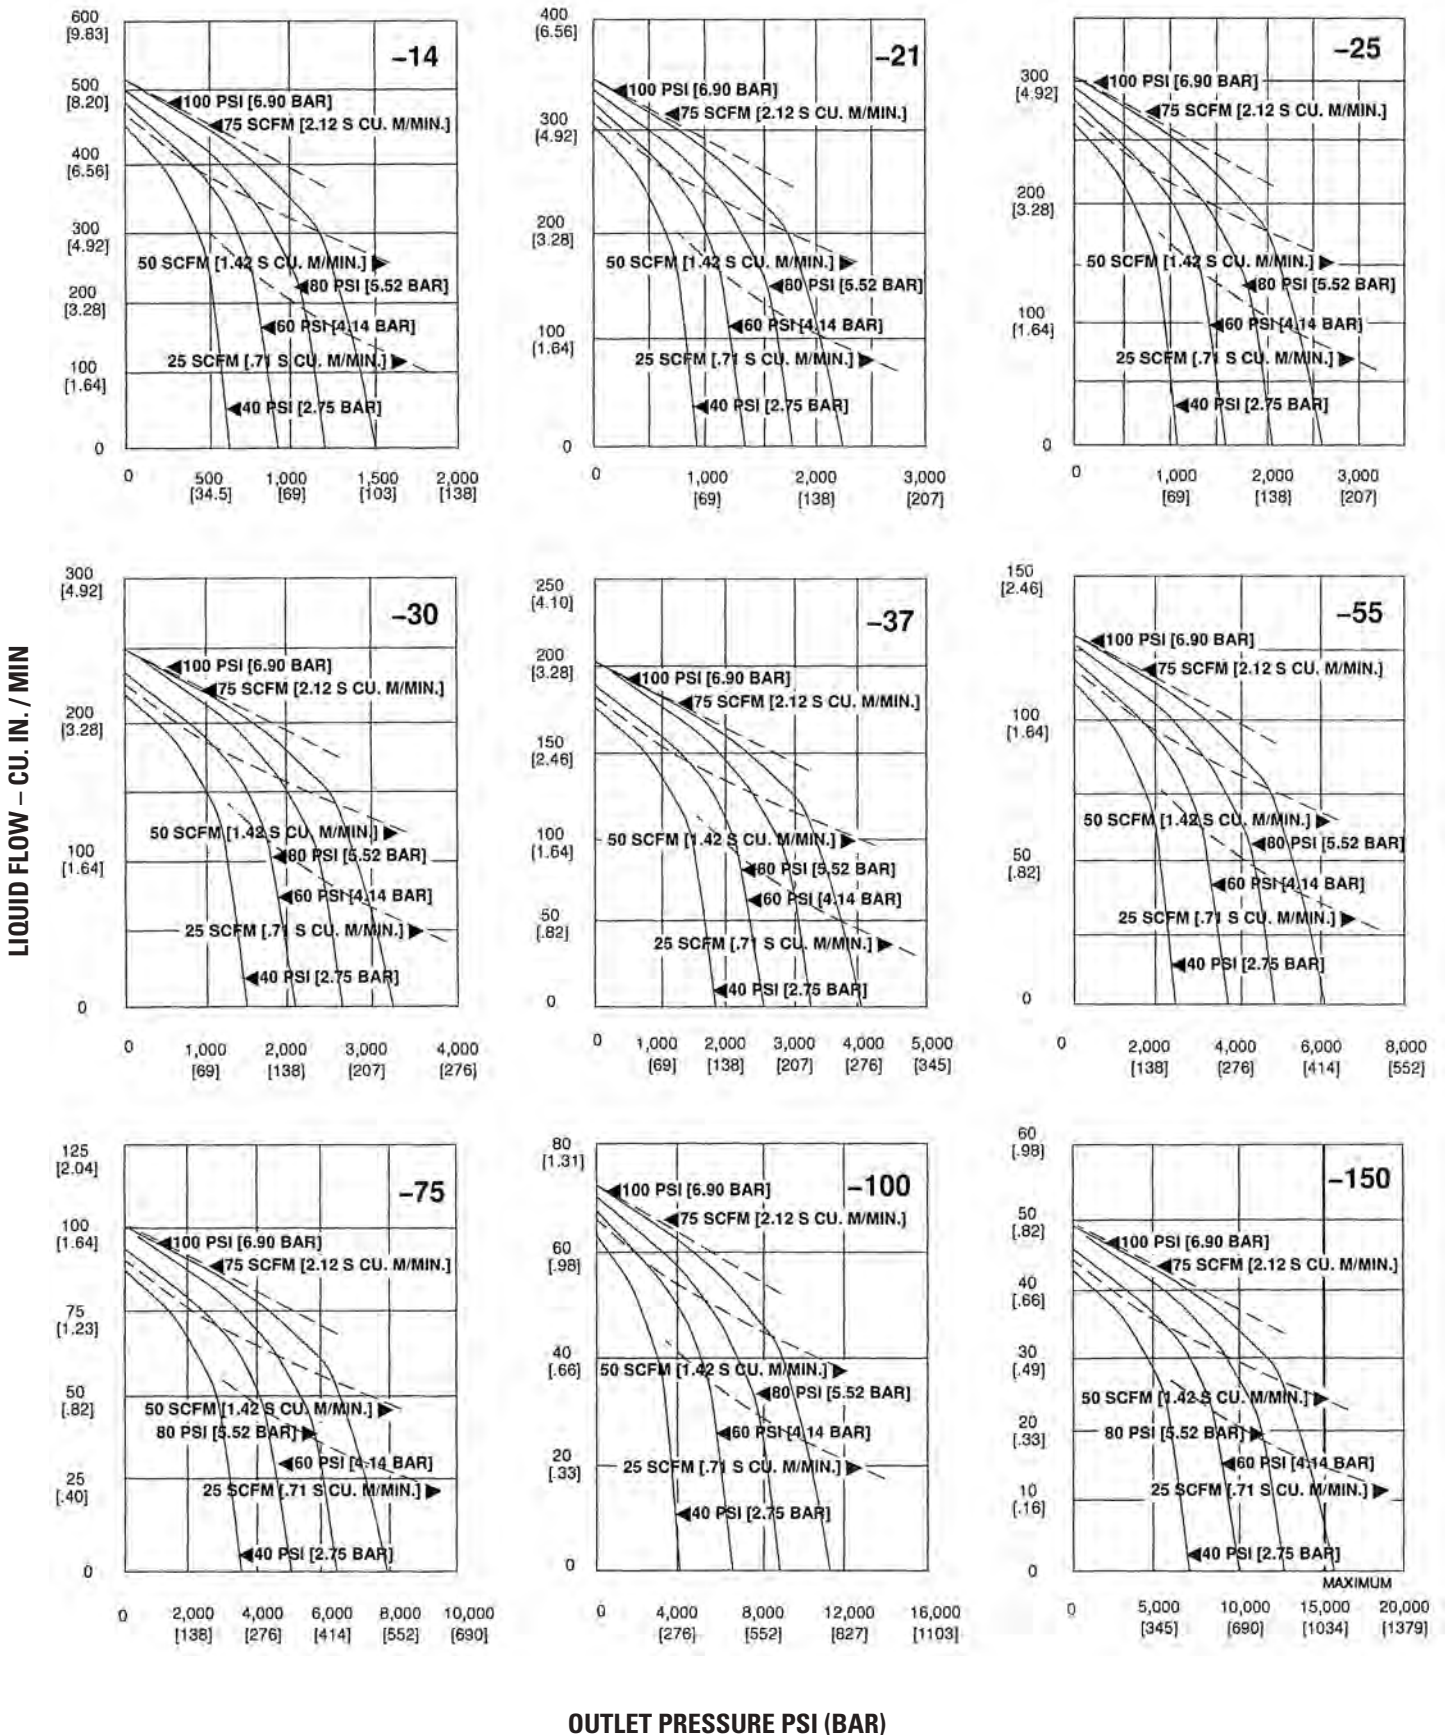


Performance Curves 1.5 hp (1.12 kW) Pumps

Light horizontal shaded area indicates an excessively high cycle rate. This should be allowed only for intermittent duty to prevent possibly excessive noise and maintenance.

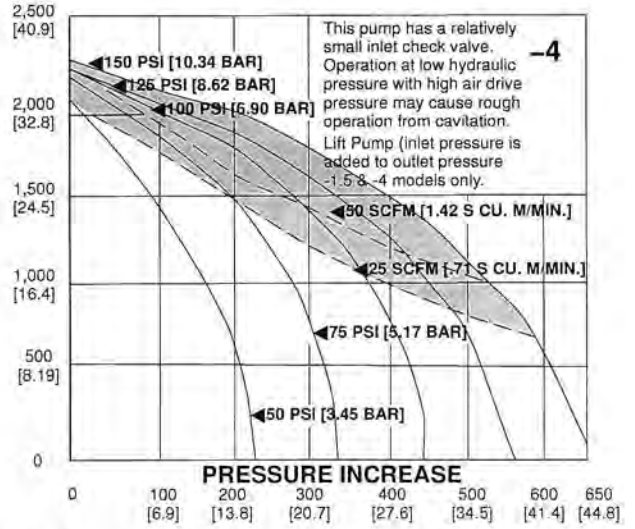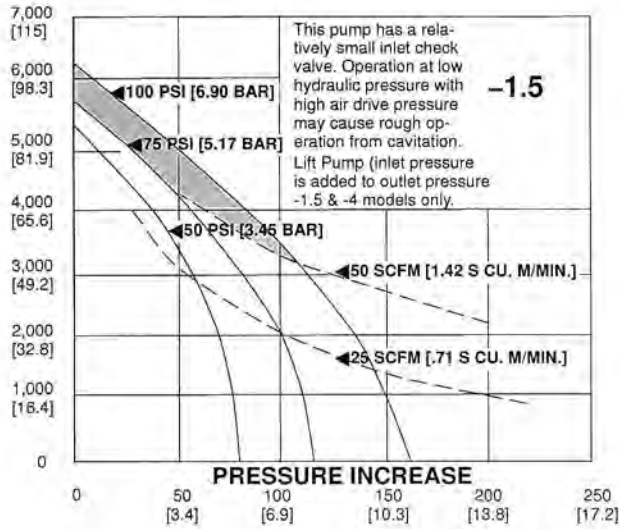

Lift pump (Inlet pressure is added to Outlet pressure -1.5 and -4 models only)



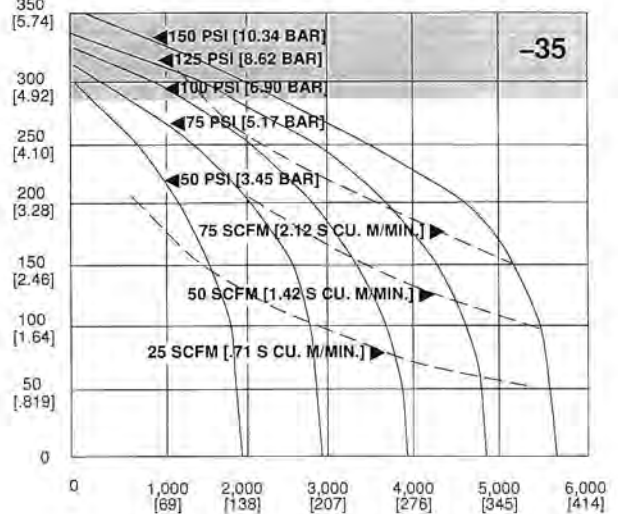
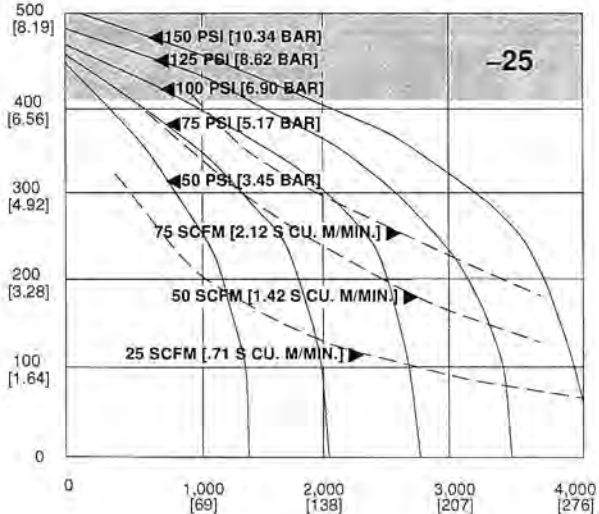
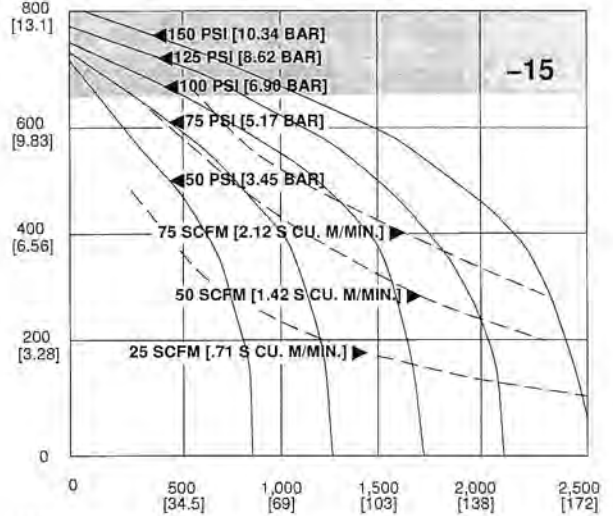
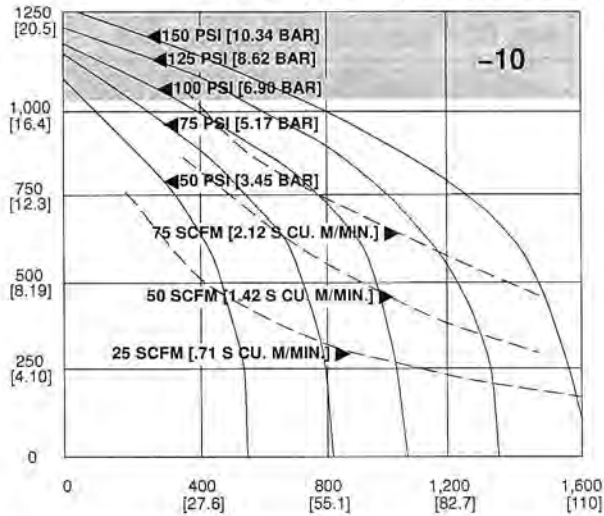


OUTLET PRESSURE PSI (BAR)

Performance Curves 1.5 hp (1.12 kW) Pumps


Intermittent duty dark shaded area is because of fatigue life limitation of materials.
(Please consult factory for further advise).

LIQUID FLOW – CU. IN. / MIN. (LITRES / MIN.)

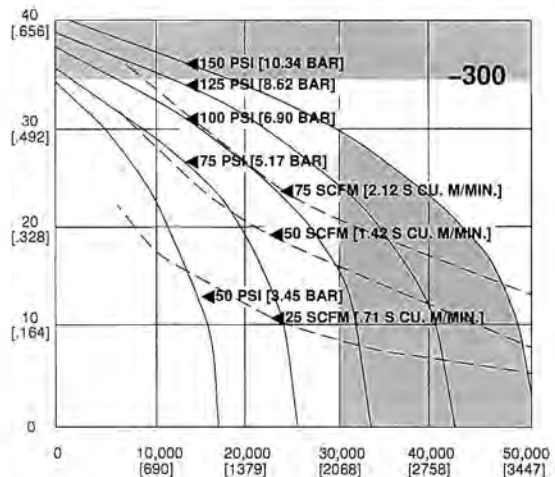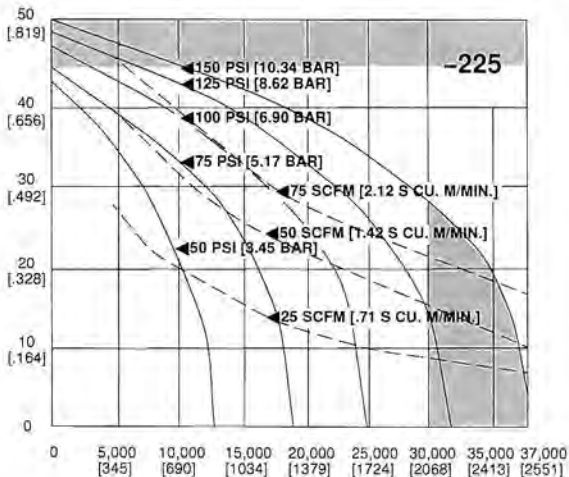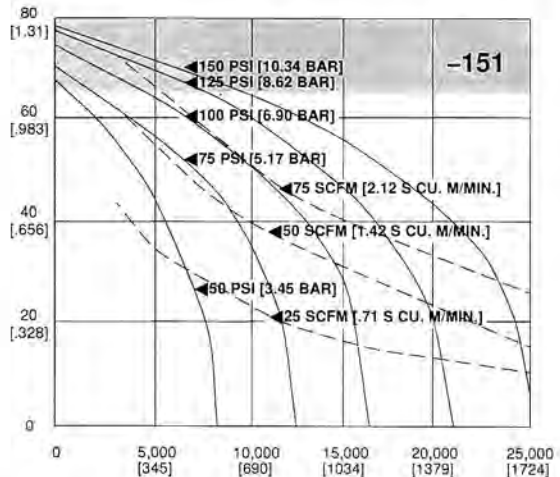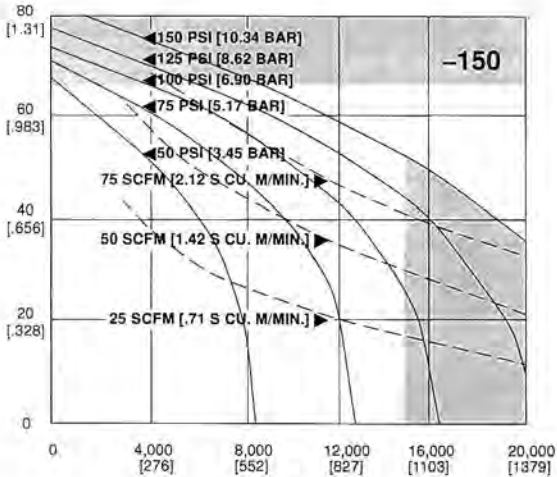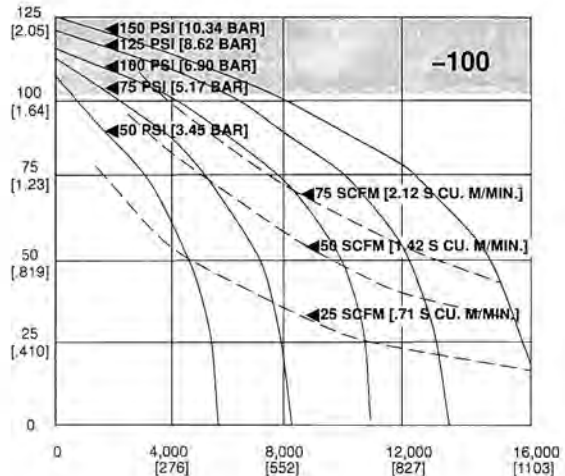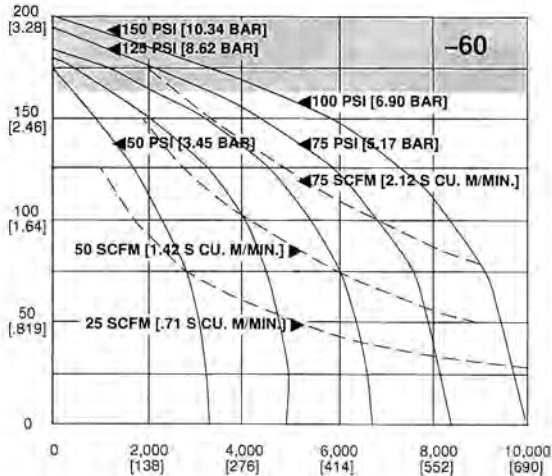

OUTLET PRESSURE PSI (BAR)





Performance Curves 2 (1.5 kW) & 2.2 hp (1.6 kW) Pumps

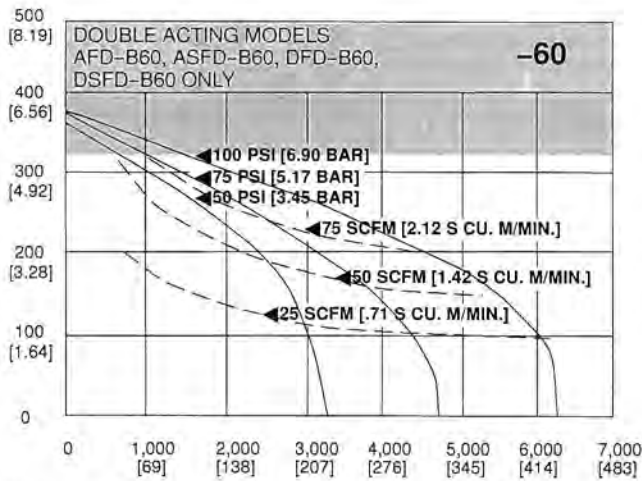

Light horizontal shaded area indicates an excessively high cycle rate. This should be allowed only for intermittent duty to prevent possibly excessive noise and maintenance (Circuit assistance is available from authorized distributor or factory).

Intermittent duty dark shaded area is because of fatigue life limitation of materials.





Reliability of the XH models (-452 thru -1373 will be improved with an air driven supercharge pump, not only to simplify priming but to reduce fatigue stresses. The higher the supercharge, the better the results. Also install a relief valve to protect the lower pressure pump from potential back pressure. Supercharging of the -1373 model is recommended for all applications.

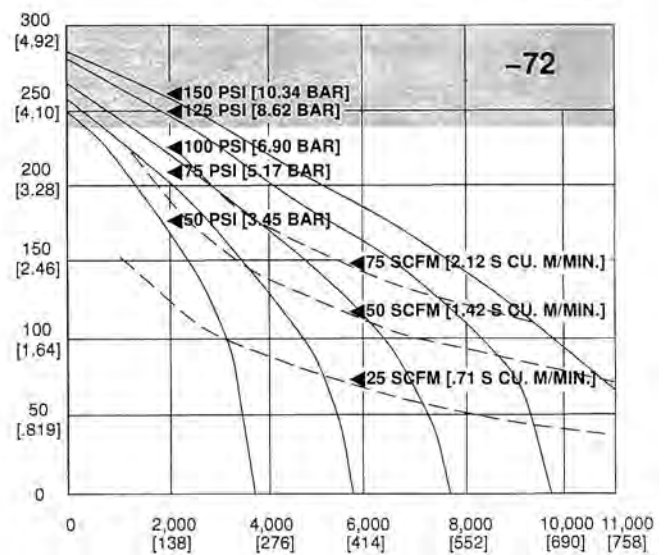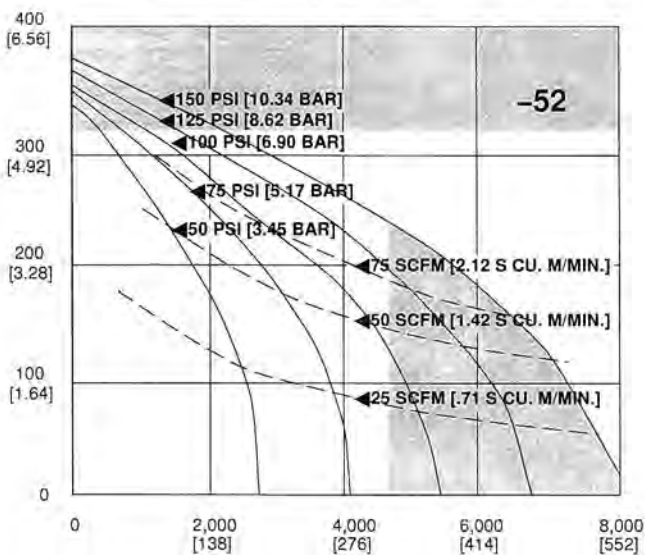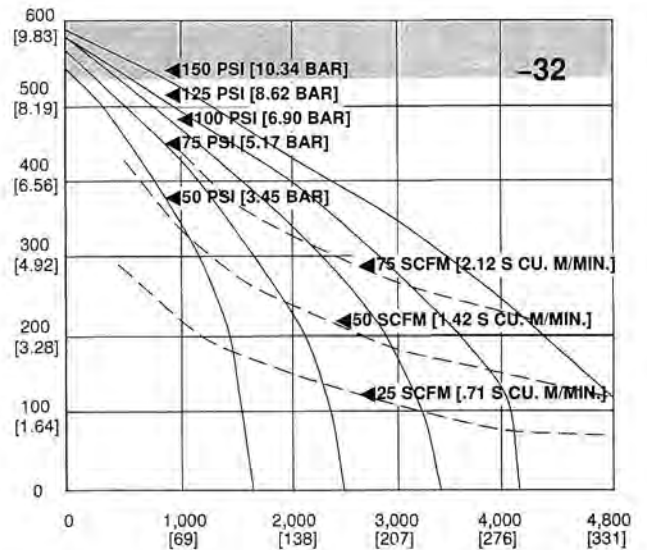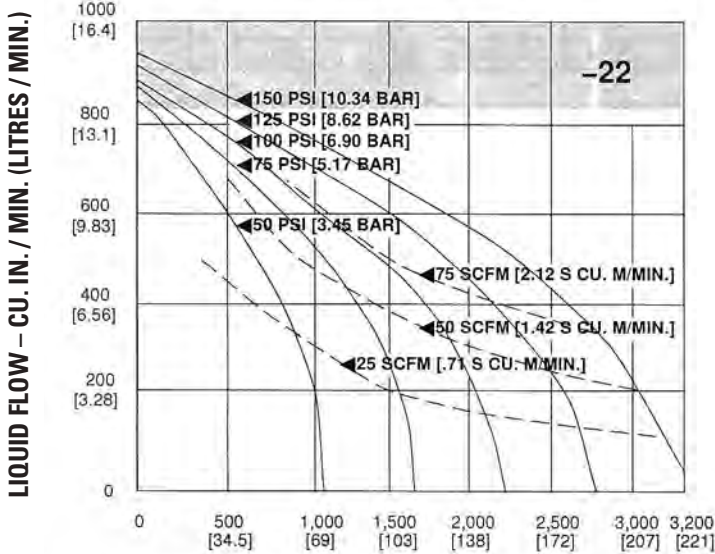

OUTLET PRESSURE PSI (BAR)

Performance Curves 2 (1.5 kW) & 2.2 hp (1.6 kW) Pumps





LIQUID FLOW – CU. IN. / MIN. (LITRES / MIN.)

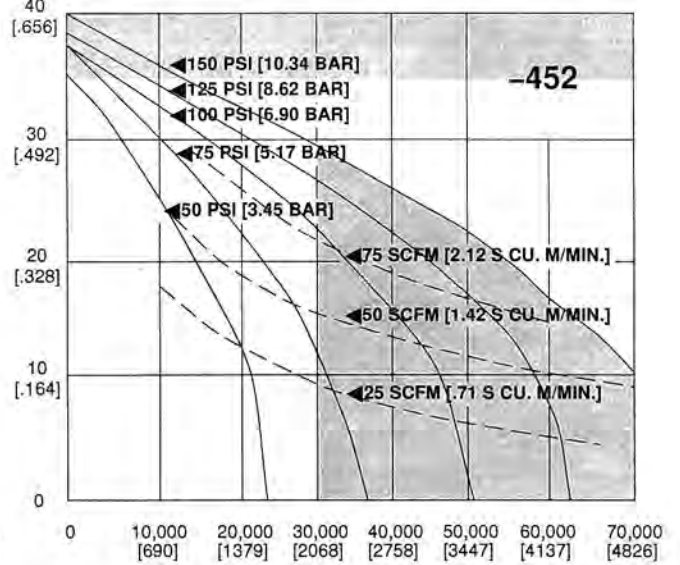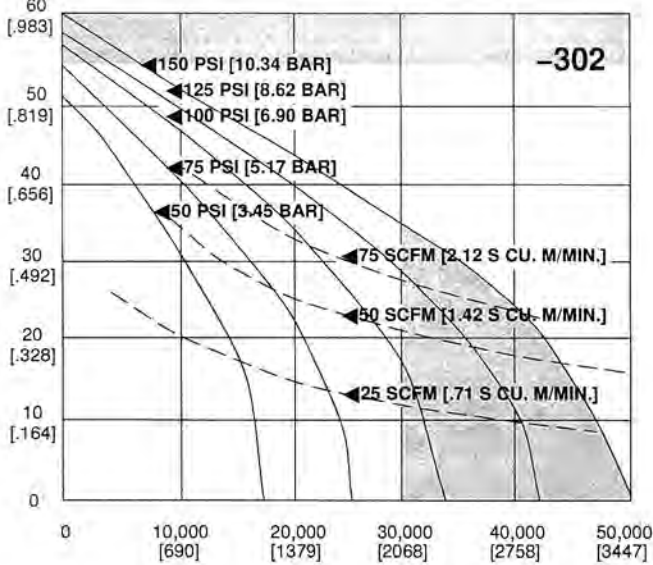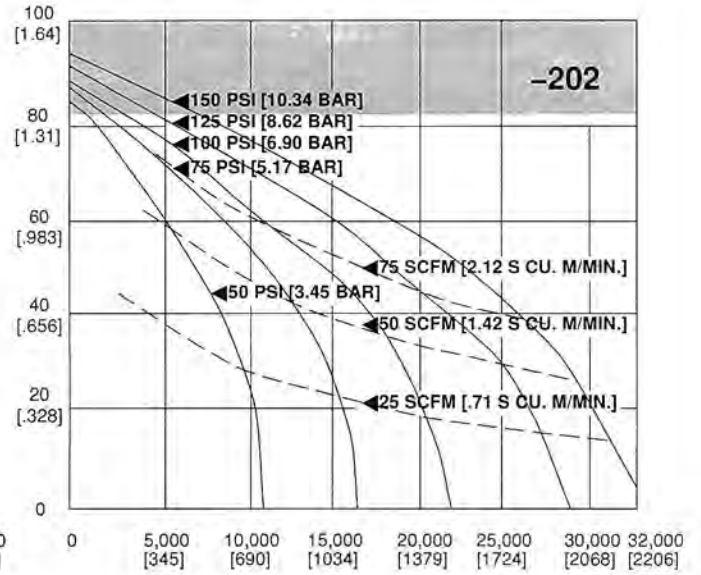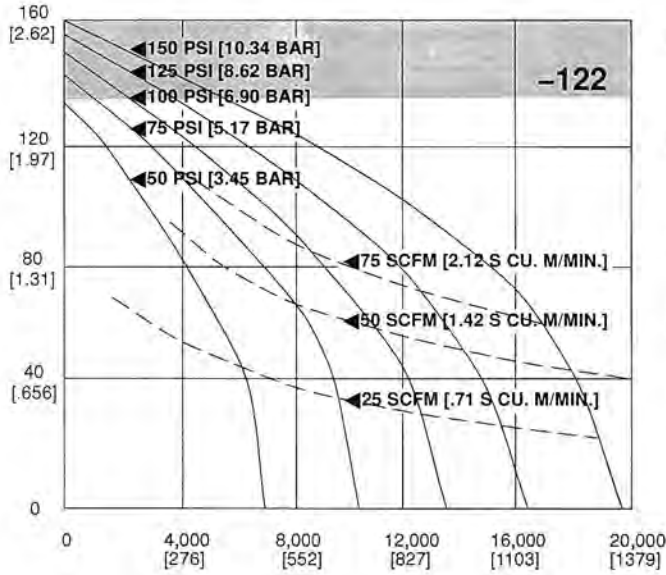

OUTLET PRESSURE PSI (BAR)

Performance Curves 2 (1.5 kW) & 2.2 hp (1.6 kW) Pumps



LIQUID FLOW – CU. IN. / MIN. (LITRES / MIN.)

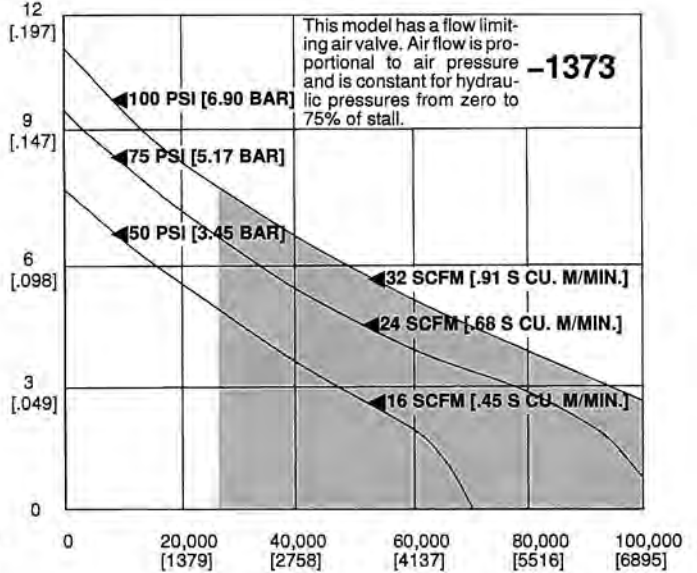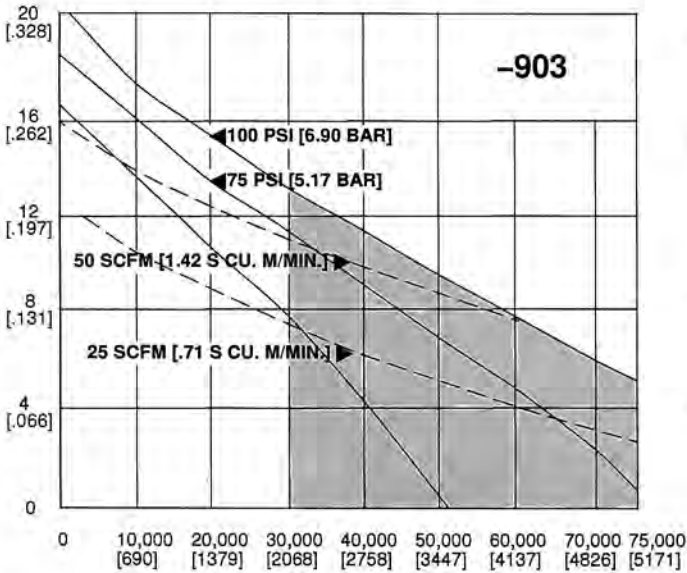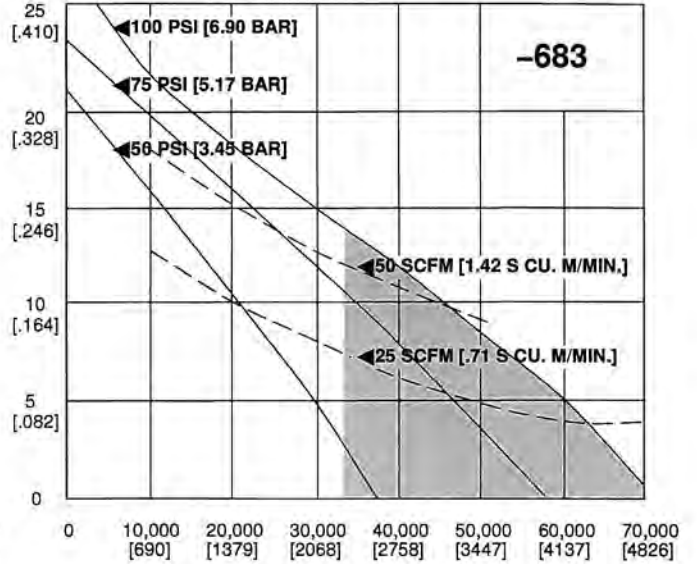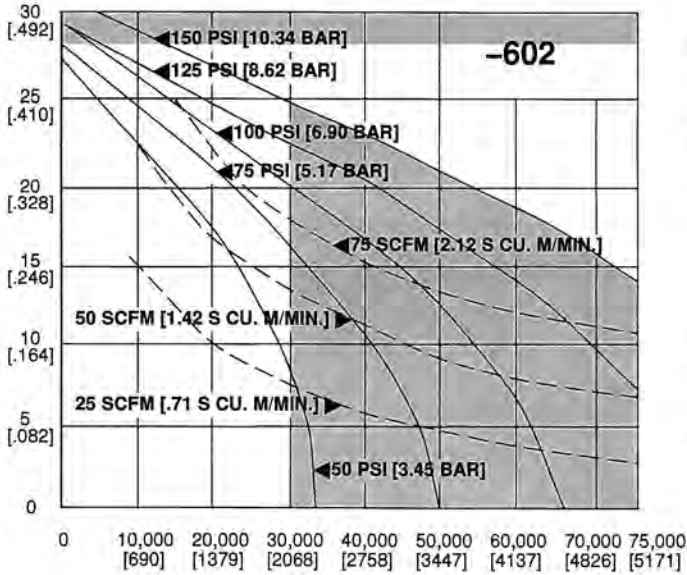



OUTLET PRESSURE PSI (BAR)

Performance Curves 6 hp (4.5 kW) Pumps

Shaded area of chart indicates cycle rate of over 200 cpm. Intermittent operation only is suggested in this area (up to maximum of 300 cpm) to avoid possible objectionable noise and vibration levels. For additional help in setting up pumping system to minimize pump operation in this runaway (shaded) area. Consult Haskel distributor or factory.

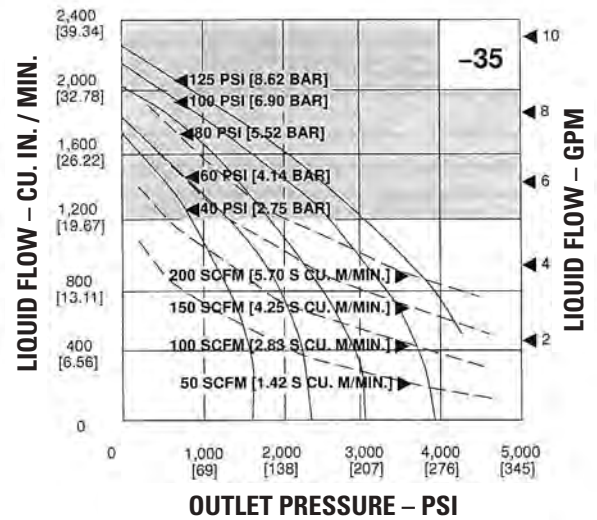
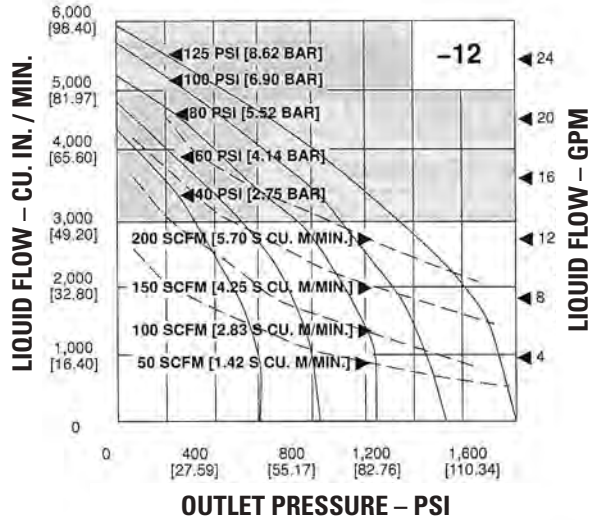


Performance Curves 6 hp (4.5 kW) Pumps

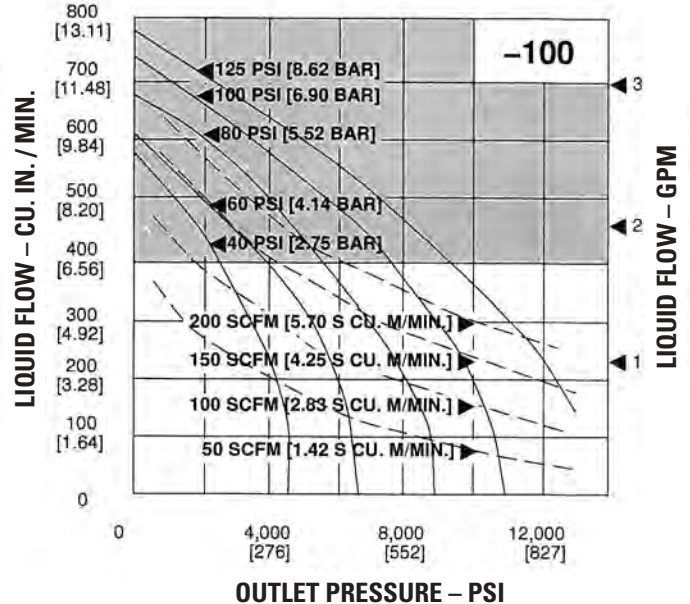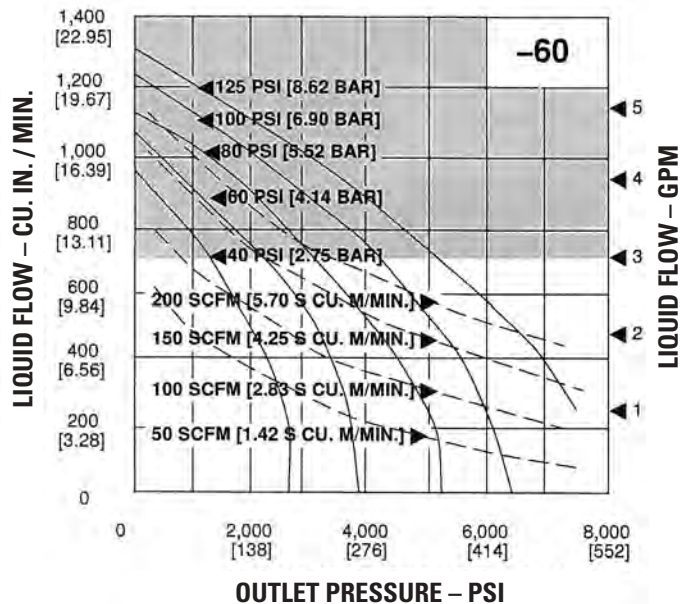

Performance Curves 8 hp (6.0 kW) Pumps



LENGTH: 26-7/8" [683]
 WIDTH: 9-1/2" [241]
 HEIGHT: 11" [279]
 WEIGHT: 64 lbs. [29 kg]

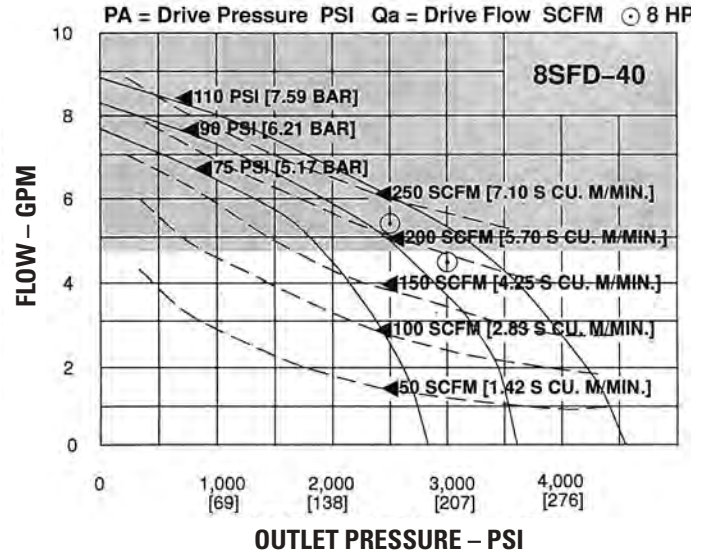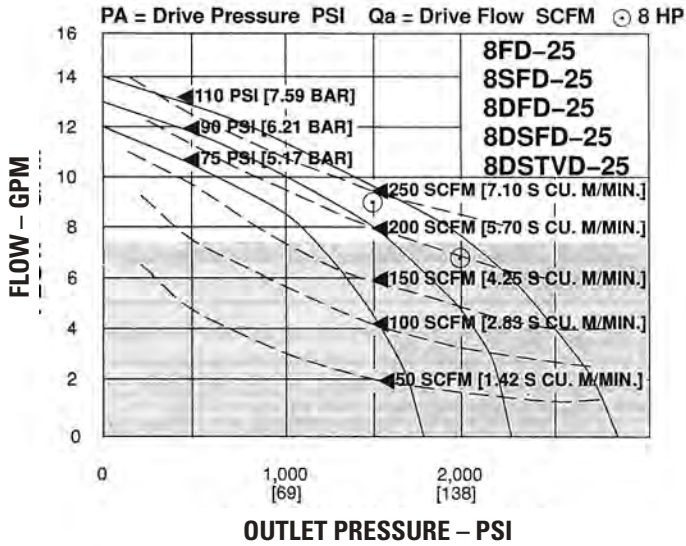



Dimensional Data 8 hp (6.0 kW) Pumps

LENGTH: 41-3/4" [1060]
 WIDTH: 9-1/2" [241]
 HEIGHT: 11" [279]
 WEIGHT: 92 lbs. [42 kg]

LENGTH: 28-3/8" [721]
 WIDTH: 9-1/2" [241]
 HEIGHT: 11" [279]
 WEIGHT: 71 lbs. [32 kg]

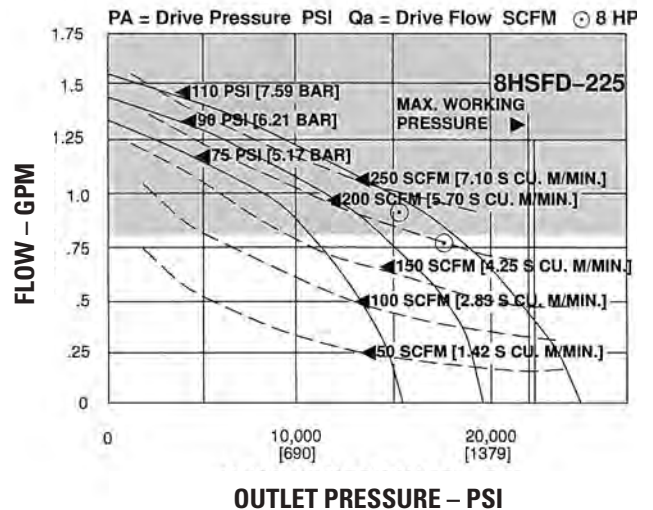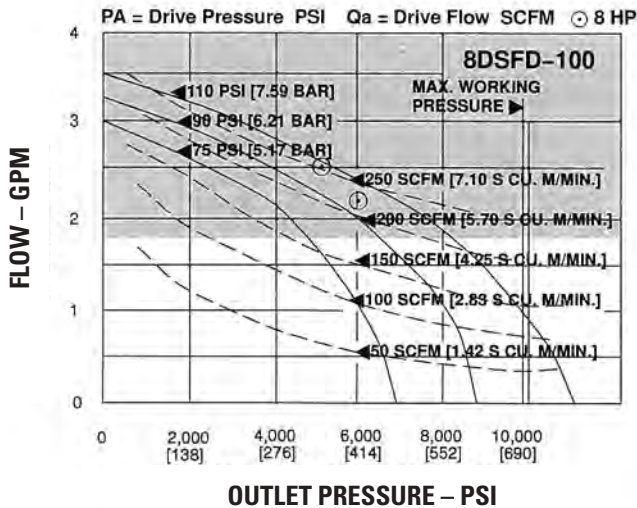

Performance Curves 10 hp (7.5 kW)

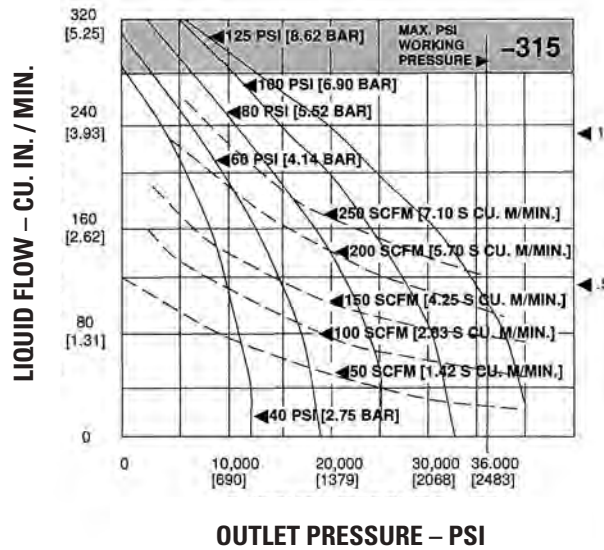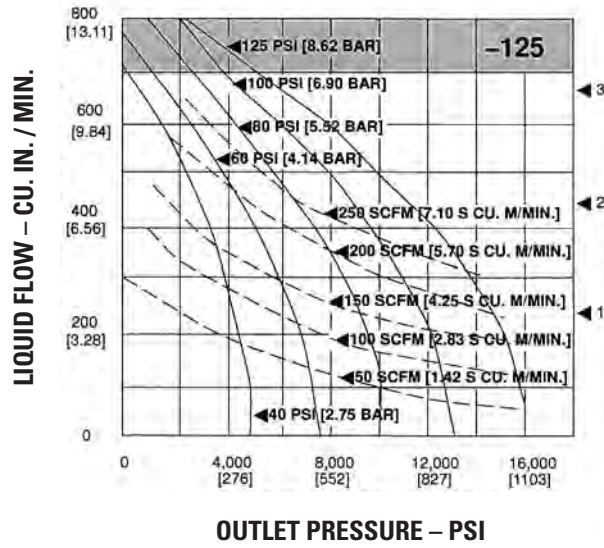

CELEBRATING OVER 60
YEARS OF HYDRAULIC AND
PNEUMATIC ENGINEERING
EXPERIENCE IN THE DESIGN
AND MANUFACTURING
OF HIGH PRESSURE
GENERATING EQUIPMENT
AND CONTROLS



Q05225
EMS511920

Haskel International, Inc.

100 East Graham Place
Burbank, California 91502 USA
Tel: 818-843-4000 / Fax: 818-556-2549 or 818-841-4291
www.haskel.com

Haskel Europe Ltd.

North Hylton Road
Sunderland SR5 3JD, England, UK
Tel: 44-191-549-1212 / Fax: 44-191-549-0911
www.haskel-europe.com

Haskel Middle East

Hamilton Sundstrand Industrial ME FZE
P.O. Box 262384 Jebel Ali, Dubai, United Arab Emirates
Tel: +971 4886 2686 / Fax: +971 4886 2687
Email: sales@haskel.ae

Haskel Asia

Hamilton Sundstrand Singapore Industrial Pte. Ltd.
23 Tagore Lane #03-06
Tagore 23 Warehouse Complex, Singapore 787601
Tel: 65-6455-7559 / Fax: 65-6455-2841
www.haskel.com.sg

For further information on Haskel
products, please visit us online at
www.haskel.com